




APLICAÇÕES

- Lavadoras desengraxantes
- Lavagens de ar e gases
- Abatimento de espumas
- Controle de impurezas
- Combate a incêndios
- Resfriamentos
- Dosadores

PROJEÇÃO



TIPOS

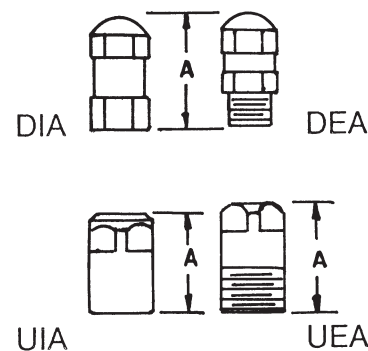


TABELA DE DESEMPENHO

Código	Conexão NPT/BSP	Partícula Tam. máx. mm	Vazão l/min									Ângulo de Aspersão				A mm			
			Pressão kg/cm ²									0.3	0.5	2	6	DIA	DEA	UIA	UEA
			0.3	0.5	1	1.5	2	3	4	5	6								
2.8	1/8"	1.0		1	1.2	1.5	1.8	2.0	2.3	2.6	2.8		120	120	103	32			
4.3		1.0		1	2	2.3	2.6	3.0	3.5	4.0	4.3		120	120	100				
5.6		1.0		1.8	2.6	3.0	3.5	4.0	4.6	5.1	5.6		120	120	102				
8		1.3		2.7	3.4	4.2	4.8	5.7	6.5	7.2	8.0		120	120	102				
10	1/4"	1.3	2.6	3.4	4.5	5.3	6.1	7.2	8.1	9.0	9.9	115	120	120	102	39	41		24
12		1.3	3.1	4.0	5.3	6.2	7.1	8.7	9.8	11	12	115	120	120	102				
14		1.3	3.7	4.7	6.2	7.4	8.5	10	11.5	12.5	13.8	115	120	120	102				
17	3/8"	1.6	4.5	5.5	7.5	9.1	10.1	12	14	15	16.8	115	120	120	102	47	48		31
20		2.4	5.3	6.5	9.0	10.5	12	14.5	16	18	20	115	120	120	102				
24		2.4	6.3	7.7	10.5	12.5	14.5	17	19.5	22	23.5	115	120	120	102				
27		2.8	7.0	9.0	12	14.5	16	19	22	24	26.5	115	120	120	105				
30	1/2"	2.8	8.0	9.0	13	16	18	22	24	27	30	115	120	120	107	58	58		36
35		3.2	9.0	11.5	15.5	18.5	21	25	29	31	34	115	120	120	107				
40		3.2	10.5	13	18	21	24	29	33	36	40	115	120	120	107				
45		3.6	12	15	20	24	27	32	37	40	45	115	120	120	107				
50		4.0	13	16	22	26	30	38	41	45	50	115	120	120	110				
70	3/4"	4.4	18	23	31	37	42	50	57	63	70	116	120	121	112			57	42
120	1"	5.6	33	43	57	68	76	92	105	116	125	117	120	123	117			72	54
180	1 1/4"	6.4	50	61	83	100	112	134	150	168	180	118	120	124	118			89	
270	1 1/2"	10.3	73	91	124	148	170	200	230	250	275	119	124	125	119			105	
540	2"	11	143	180	245	290	330	395	445	500	540	120	124	125	119			140	
800	2 1/2"	14	220	260	360	430	490	580	660	740	800	120	125	125	119			180	

MATERIAL: LATÃO - INOX - PVC - NYLON - Outros materiais sob consulta.

ESPECIFICAR NO PEDIDO: REFERÊNCIA COMPLETA DO BICO E MATERIAL.

EXEMPLO: Bico Spray - CC2 DIA 8 1/8" BSP - LATÃO.